

## ALMEMO® 710



**ALMEMO® precision measuring instrument, latest V7 generation**  
**With data logger function and touchscreen.**  
**Comprehensive range of functions for all application areas.**  
**Increased measuring accuracy, fast measuring rate.**  
**10 measuring inputs**

**Data logger from our latest V7 generation**

Data logger ALMEMO® 710 offers outstanding functions - thanks to our latest D7 sensors.

**High-quality display - easy and convenient touchscreen operation**

The brightly illuminated, generously dimensioned 5.7-inch color graphics display shows all measured values and functions clearly and precisely. The device is operated easily and conveniently via touchscreen. The menu guidance system, incorporating wizards and help windows, has a clear, straightforward structure.

Measured values, peak values, average values, and limit values can all be displayed in an easy-to-understand way in various forms, namely list, bar chart, or line graph (up to 5 lines).

Users can even configure their own customized user menus to display those parameters required by a particular application. Choice of languages : German, English, French, Czech

**One measuring instrument for every use**

The measuring instrument is enclosed in a handy, compact housing with rubberized impact protection. This device can be used in a wide variety of ways, in mobile applications or as a desktop unit, on a folding stand or as a stationary unit in a wall-mounted housing.

It incorporates a powerful rechargeable lithium battery to ensure a long operating time.

**Data logger for all storage applications**

For the purpose of saving measured values the device incorporates an 8-MB flash memory. This can also be configured as a ring memory for monitoring tasks.

To save larger data quantities an external memory is available in the form of a plug-in SD card.

For autonomous long-term monitoring the data logger can also be run in energy-saving sleep mode.

**Measuring inputs for 10 ALMEMO® sensors, all generations**

Data logger ALMEMO® 710 incorporates 10 measuring inputs. All new and already existing sensors designed for any measurable variable can be connected and evaluated.

Sensors using analog signals pass via the integrated high-speed, high-resolution A/D converter. Additional electrical isolation between measuring inputs and power supply (device ground) increases measuring quality.

Digital D6 and the latest digital D7 sensors transfer measured values to the measuring instrument directly in digital form.

The measuring instrument supports all ALMEMO® plug connectors and sensor functions. Digital D6 / D7 sensors can be configured directly via the touchscreen.

**New digital ALMEMO® D7 sensors**

With these digital ALMEMO® D7 sensors the ALMEMO® system is enhanced by many new functions.

They operate via an all-digital interface to the ALMEMO® 710 measuring instrument ensuring high-speed serial transmission of all measured values.

The measuring ranges of ALMEMO® D7 plugs are independent of the measuring instrument and can be expanded as and when required for new applications.

Measured values can be displayed with up to 8 digits (depending on range) and the units with up to 6 characters. Sensor designation and information can be up to 20 characters.

The ALMEMO® D7 sensor has its own processor. These all work in parallel at their sensor-specific sampling rate. D7 sensors thus attain very high measuring speeds in dynamic measuring operations. Scanning times on the ALMEMO® 710 can be set individually for quick-acting and slow-acting sensors.

The ALMEMO® D7 plug can process up to 10 channels for measured values and function values. This includes new applications, especially for multi-purpose sensors (e.g. Meteorological sensors) and for linking up to complex third-party devices (e.g. chemical analysers, power analysers).

**Other equipment**

With 3 ALMEMO® output sockets it is possible to connect simultaneously a PC / network, an ALMEMO® output interface with relays and analog output, and an SD memory card.

The ALMEMO® 710 incorporates an atmospheric pressure sensor to ensure automatic pressure compensation for measuring operations involving inter alia air flow or humidity variables.

With option KL it is possible - for an ALMEMO® sensor (e.g. temperature or pressure sensors) - to program multi-point adjustment or linearization in the ALMEMO® plug itself.

This option is possible with all ALMEMO® plug versions. Standard connector (analog or DIGI), ALMEMO® D6 and D7 plugs..



## ALMEMO® 710



**Precision measuring instrument, latest V7 generation, 10 measuring inputs  
Data logger with internal memory or external memory connector (accessory)**

## Technical data

<b>Measuring inputs</b>	10 ALMEMO® input sockets for ALMEMO® sensors, all generations analog sensors, D6 and D7 sensors	<b>Standard equipment</b>	
<b>Precision class</b>	AA (see page 01.04)	<b>Display</b>	Graphics display
<b>Measuring rate for analog sensors, D6 sensors</b>	2.5 / 10 / 50 / 100 mops (measuring operations per second)		5.7-inch TFT LCD VGA, 640 x 480 pixels white LED, dimmable
<b>Electrical isolation for analog sensors</b>	with semiconductor relays (50 V) Additional electrical isolation between measuring inputs and power supply (device ground)	<b>Key pad</b>	Capacitive touchscreen and 3 additional touch keys
<b>Channels</b>	Up to 100 measuring channels per device	<b>Memory</b>	8-MB flash memory (400,000 up to 1.5 million meas. values)
<b>Sensor power supply</b>	6 / 9 / 12 V, maximum 2 x 400 mA for supply via mains adapter 12 V, maximum 2 x 400 mA	<b>Date and time-of-day</b>	Real-time clock (4.7 ppm) buffered with lithium battery
<b>Atmospheric pressure sensor Accuracy</b>	Integrated, meas. range 700 to 1100 mbar ±2.5 mbar (at 23 °C ±5 K)	<b>Power supply</b>	
<b>Outputs</b>	3 ALMEMO® sockets, suitable for all output modules (data / analog / trigger / relay cables, memory connector, etc.)	<b>Rechargeable battery/ies</b>	2 rechargeable lith. batteries, total 15.6 Ah Integrated, high-speed charging (3 hours) ZA1312NA10 100 to 240 VAC to 12 VDC, 2 A, electr. isol.
		<b>Mains adapter</b>	
		<b>Current consumption (without input and output modules)</b>	
		<b>Active mode</b>	approx. 300 to 500 mA
		<b>Sleep mode</b>	approx. 0.05 mA
		<b>Housing</b>	222 x 169 x 61 mm (WxDxH) 1200 g ABS / TPE, 2-shot technology with rubberized impact protection
		<b>ALMEMO® 710</b>	with folding stand
		<b>ALMEMO® 710 WG</b>	with DIN rail fixture for wall-mounting, connections facing downwards

## Accessories

	Order no.
Memory connector with micro SD, including USB card reader (see chapter „General accessories“)	<b>ZA1904SD</b>
Large carry case, aluminum profile frame / ABS, inside dimensions 48 x 35 x 6+6 cm (WxDxH)	<b>ZB2590TK2</b>

## Connecting cables

	Order no.
Ethernet data cable, electrically isolated	<b>ZA1945DK</b>
USB data cable with 5V device supply from PC not electrically isolated	<b>ZA1919DKU5</b>
Analog output cable -1.25 to +2.0 V	<b>ZA1601RK</b>
Trigger and alarm cable (2 relays, 0.5 A, 50 VDC)	<b>ZA1006EKG</b>

Note on WinControl measuring software

As measuring software WinControl is suitable for current version 7 and above. For version 6 or earlier a WinControl update is required.

Variants and description (see chapter „Software“).

## Option

	Order no.
Multi-point adjustment and / or linearization can - with all ALMEMO® plug versions - be programmed by users themselves	<b>OA710KL</b>
Temperature ranges for 8 refrigerants	<b>SB0000R2</b>

## Standard delivery

	Order no.
USB data cable ZA1919DKU, Mains unit 12 V / 2 A ZA1312NA10, Manufacturer's test certificate	
Mobile device with folding stand, in case ZB9710TK <b>Precision measuring instrument ALMEMO® 710</b>	<b>MA710</b>
Stationary device with wall-mounting, <b>Precision measuring instrument ALMEMO® 710WG</b>	<b>MA710WG</b>

DAkkS or works calibration KE90xx, electrical, for measuring instrument (see chapter „Calibration certificates“).

DAkkS calibration meets all the requirements regarding test resources laid down in DIN EN ISO/IEC 17025.

## ALMEMO® 710 Clear, precise display - easy and convenient touchscreen operation

10/2016 • We reserve the right to make technical changes.

MO	FHA746-2	value	max	min
0.0	T, t	123.4 °C	234.6	79.4
0.1	RH, Uw	56.8 %RH	67.3	48.9
0.2	DT, td	15.2 °C	23.5	11.7
0.3	MH, r	11.2 g/kg	14.4	9.3
0.4	VP, e	8.8 mbar	9.4	4.6
0.5	AH, dv	8.2 g/m <sup>3</sup>	8.4	6.3
0.6	AP, p	998.8 mbar	999.8	834.9

List of active measuring channels



Display of measured values as a bar chart



Display of measured values as a line graph

Channel 3.0 temperature channel select

channel indication °C J-temperature

use temp. sensor as external cold junction (°J)

use temp. sensor of connector as cold junction (#J)

convert flow parameters to standard (RN)


q w e r t z u i o p

a s d f g h j k l

y x c v b n m

123/ \_ Cl ← OK

Keypad for programming

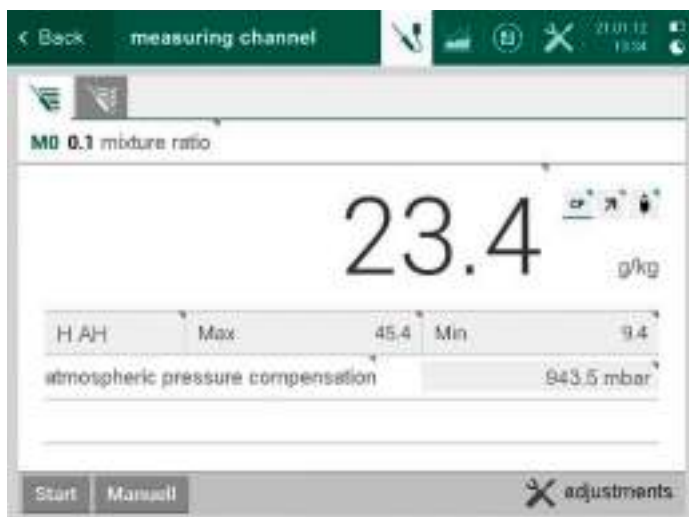

Generously dimensioned display of measured values

- 
- sensor adjustments
  - channel functions
  - display adjustments
  - data logger
  - output modules
  - device adjustments
  - locking mode
  - power supply
  - memory
  - info

Settings for all sensor and device parameters