

Content

The right flow sensor for each and every measuring task	09.02
Correction factors ensure precise air speed measurement.	09.03
Air Speed for selected Pitot tubes	09.03
Digital vane anemometer FVAD 15 for air	09.04
Digital vane anemometer FVAD 15-H	09.06
Differential pressure and Pitot tube measurement	
Measuring connector	09.10
Pitot Tubes for Differential Pressure Sensors FDA602	09.11
Digital thermoanemometer FVAD 35 THx	09.12
Thermoelectric flow sensor	09.13



The Right Flow Sensor For Any Measuring Task

For measuring the flow velocity, typically, three methods are used, which are particularly different from each other with regard

to their measuring range and the operating temperature:

- Pitot tubes
- Rotating vanes
- Thermoanemometer probes

Pitot Tubes

The air velocity is determined by the dynamic pressure and the static pressure. Pitot tubes are robust and are available in special steel or nickel-plated brass. They connect to ALMEMO® devices by silicone hoses and a differential pressure module.

Advantage:

suitable for high flow velocities and harsh operating conditions, high ambient temperatures possible, easy to clean

Disadvantage:

strongly directional, low flow velocities are not measurable, temperature-dependent, limited accuracy, sensitive to turbulent flows

Rotating Vanes

The flow velocity is determined through a frequency measurement. Our rotating vanes are sensitive transducers with diamond bearings that are very precisely adjusted. This ensures high accuracy.

Advantage:

high accuracy at medium flow velocities and medium ambient temperatures, insensitive to turbulent flows

Disadvantage:

sensitive sensor technology, sensitive to mechanical stress, directional

Thermoanemometers

Thermistors and hot wire anemometers are highly sensitive sensors. The measuring element is continuously heated up. A control circuit keeps the temperature of the element, which has cooled down by the air flow, on a constant value. The control current is proportional to the flow velocity.

Advantage:

even very small air speeds can be measured (e.g. draught measurements), direction-independent measurements are also possible

Disadvantage:

sensitive sensor technology, sensitive to mechanical stress and contamination, sensitive to turbulent flows, high current consumption, limited ambient temperature.

Correction Factors for Exact Measurements of the Air Speed

Air Temperature	940 mbar	960 mbar	980 mbar	1000 mbar	1020 mbar	1040 mbar
-30°C	0.942	0.932	0.922	0.913	0.904	0.895
-20°C	0.961	0.951	0.941	0.932	0.923	0.914
-10°C	0.980	0.970	0.960	0.950	0.941	0.931
0°C	0.998	0.988	0.978	0.968	0.958	0.949
10°C	1.016	1.005	0.995	0.985	0.975	0.966
20°C	1.035	1.024	1.013	1.003	0.993	0.983
30°C	1.051	1.040	1.029	1.019	1.009	0.999
40°C	1.069	1.057	1.047	1.036	1.026	1.016
50°C	1.085	1.074	1.063	1.052	1.042	1.031
60°C	1.102	1.09	1.079	1.068	1.057	1.047
70°C	1.118	1.106	1.095	1.084	1.073	1.063
80°C	1.135	1.123	1.111	1.100	1.089	1.078
90°C	1.151	1.139	1.127	1.116	1.105	1.094
100°C	1.167	1.154	1.142	1.131	1.120	1.109
150°C	1.242	1.229	1.216	1.204	1.192	1.180
200°C	1.314	1.300	1.287	1.274	1.261	1.249
250°C	1.381	1.367	1.353	1.339	1.326	1.313
300°C	1.446	1.431	1.416	1.402	1.388	1.375
400°C	1.567	1.55	1.534	1.519	1.504	1.489
500°C	1.68	1.663	1.646	1.629	1.613	1.597
600°C	1.784	1.766	1.748	1.73	1.713	1.696
700°C	1.884	1.865	1.846	1.827	1.809	1.791

The true air velocity depends on the air temperature and the barometric air pressure. Therefore, the measured value must be corrected according to the above table

to obtain exact measurements of the air speed.

Example:

Measured air velocity 50m/s, air tempera-

ture 80°C, atmospheric pressure 960mbar. The measured value must be multiplied with the correction value 1.123. The air velocity is, therefore, 56.1m/s.

Air Speed For Selected Dynamic Pressures (Prandtl Pitot Tube, T = 22°C)

Dynamic Pressure [Pa]	Dyn. Press. [mm h.o.water]	Air Speed [m/s]
1	0.1	1.29
2	0.2	1.83
3	0.3	2.24
4	0.41	2.59
5	0.51	2.89
10	1.02	4.09
20	2.04	5.78
30	3.06	7.08
40	4.08	8.18
50	5.1	9.14
100	10.2	12.93

Digital vane anemometer FVAD 15 for air, with ALMEMO® D6 plug

Technical data and functions, FVAD 15 series

- Measuring air flow velocity
- The vane anemometer is in practice unaffected by environmental variables such as pressure, temperature, density, or humidity.
- The design is compact - especially suitable for mobile measuring operations - heating, ventilating, air-conditioning.
- The probe head has an aero-dynamically optimized shape and protected bearings.
- On those variants with a snap-on head the probe head can be exchanged quickly and easily, e.g. for servicing.
- ALMEMO® D6 plug with high-resolution frequency measurement
- One measuring channel is programmed (at our factory).
Flow velocity (m/s, v).

Technical data FVAD15 series

Operative range	-20 to +140 °C
Maximum resolution	0.01 m/s
Nominal temperature	+22 °C ±2 K
Connecting cables	Fitted cable, 1.8 meters, with LEMO® plug
ALMEMO® adapter cable	LEMO® coupling cable, 0.2 meters with ALMEMO® D6 plug
ALMEMO® D6 plug	
Frequency measurement	resolution 0.01 Hz
Refresh rate	0.5 seconds for all channels
Averaging period	2 seconds
Supply voltage	6 to 13 VDC
Current consumption	4.5 mA

General features, ALMEMO® D6 sensors

see page 01.08

Accessories	Order no.
Extension set Ø 15 mm, 4 x 255 mm	ZV9915VR3
Telescopic extension Ø 15 to 24 mm, 330 / 1010 mm	ZV9915TV

DAkkS or factory calibration KV90xx air flow for digital sensor (see chapter „Calibration certificates“).
DAkkS calibration meets all the requirements regarding test resources laid down in DIN EN ISO/IEC 17025.

Digital vane anemometer FVAD 15 S120/S140 with snap-on head, mini



Accessories

- Spare snap-on head, mini, 20 m/s
- Spare snap-on head, mini, 40 m/s

Order no.

- ZV9915S120
- ZV9915S140

Technical data

Accuracy	±1 % of final value ±1.5 % of measured value
Probe head	Ø 22 mm, length 28 mm Replaceable snap-on head
Insert opening	from 35 mm
Sensor shaft	Ø 15 mm
Sensor length	175 mm including probe head

Standard delivery	Order no.
Digital vane anemometer with snap-on head, fitted cable, adapter cable with ALMEMO® D6 plug	
Measuring range 0.4 to 20 m/s	FVAD15S120
Measuring range 0.5 to 40 m/s	FVAD15S140

Digital vane anemometer FVAD 15 S220/S240 with snap-on head, micro



Accessories

Spare snap-on head, micro, 20 m/s
Spare snap-on head, micro, 40 m/s

Order no.

ZV9915S220
ZV9915S240

Technical data

Accuracy	±1 % of final value ±3 % of measured value
Probe head	Ø 11 mm, length 15 mm Replaceable snap-on head
Insert opening	from 16 mm
Sensor shaft	Ø 15 mm
Sensor length	165 mm including probe head


Standard delivery

Digital vane anemometer with snap-on head fitted cable, adapter cable with ALMEMO® D6 plug
Measuring range 0.6 to 20 m/s
Measuring range 0.7 to 40 m/s

Order no.

FVAD15S220
FVAD15S240

Digital vane anemometer FVAD 15 SMA1 with snap-on head, macro

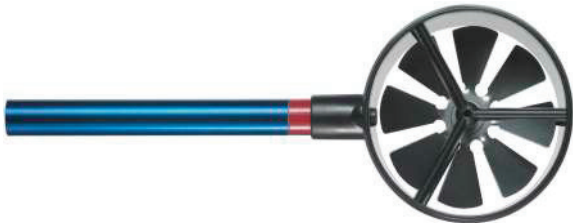

Accessories

Spare snap-on head, macro, 20 m/s
Carry-case

Order no.

ZV9915SMA1
ZB9605TK

Technical data

Accuracy	±1 % of final value ±1.5 % of measured value
Probe head	Ø 85 mm, length 80 mm Replaceable snap-on head
Insert opening	from 119 mm
Sensor shaft	Ø 15 mm
Sensor length	235 mm including probe head


Standard delivery

Digital vane anemometer with snap-on head fitted cable, adapter cable with ALMEMO® D6 plug
Measuring range 0.2 to 20 m/s

Order no.

FVAD15SMA1

Digital vane anemometer FVAD 15 MA1 with brass probe head, macro attachment for measuring air quantity

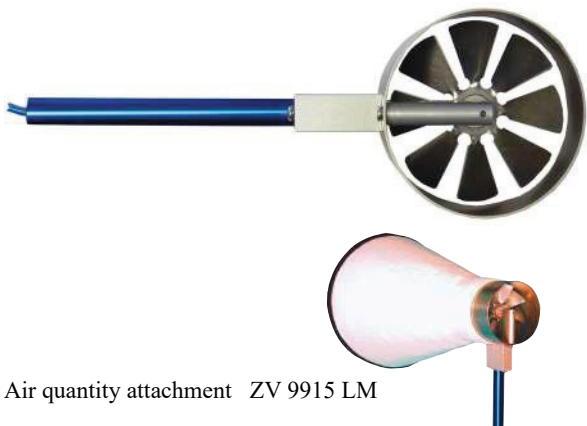

Air quantity attachment ZV 9915 LM

Technical data

Accuracy	±0.5 % of final value ±1.5 % of measured value
Probe head	Ø 80 mm, length 70 mm fitted brass probe head
Insert opening	from 108 mm
Sensor shaft	Ø 15 mm
Sensor length	225 mm including probe head

Accessories

Carry-case for rotating vane
Air quantity attachment (plug-in)
Ø 200 mm (up to approx. 275 m³/h)

Order no.

ZB9605TK
ZV9915LM

Standard delivery

Digital vane anemometer with fitted brass probe head fitted cable adapter cable with ALMEMO® D6 plug
Measuring range 0.2 to 20 m/s

Order no.

FVAD15MA1

Digital vane anemometer FVAD 15-H for special applications, with ALMEMO® D6 plug

Technical data and functions

- The precision measuring heads and the sensor shaft are made of aluminum or stainless steel.
- The flow velocity is measured with high accuracy.
- In practice, measurements in air and gases are unaffected by environmental variables such as pressure, temperature, or humidity. The low dependence of the measured value on density of the gas can be compensated for. The density can be programmed in the ALMEMO® D6 sensor menu in the ALMEMO® V7 device.
- Several measuring heads can be used for measurements in air and gases as well as in liquids.
- Some variants detect the direction of flows and display the measured value with an algebraic sign.
- The robust type of construction is suitable for mobile measuring operations as well as for stationary measuring operations.
- The ALMEMO® D6 plug measures the frequency signal of the rotating vane with high resolution.
- 1 measuring channel is preprogrammed (ex works): Flow velocity (m/s, v).

Technical data


Maximum resolution	0.01 m/s
Nominal temperature	22 °C ±2 K
Connecting cable	permanently fitted cable, with ALMEMO® D6 plug

ALMEMO® D6 plug	
Frequency measurement	resolution 0.01 Hz
Refresh rate	0.5 seconds for all channels
Averaging period	2 seconds, programmable from 2 to 100 seconds
Supply voltage	6 to 13 VDC
Current consumption	8 mA

General features for the ALMEMO® D6 sensors: see page 01.08

Further variants are available upon request!

Digital vane anemometer FVAD 15-H16GFAMC40

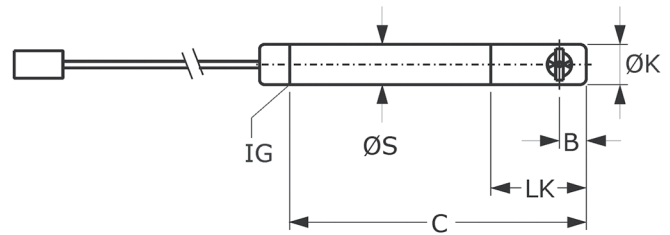

Technical data

Variant:	Micro, aluminum, suitable also for liquids	Type of rotating vane:	MC40GFA, aluminum
Measured medium:	air and gases or liquids (precondition: no cavitation)	Measuring head: dimension ØK	aluminum, Ø 16 mm
Operative range:	-20 to +100 °C (including cable)	dimension LK	53 mm
Pressure resistance:	up to 3 bar overpressure	dimension B	10.65 mm
Measuring range:	in air: 0.6 to 40 m/s, or in liquids: 0.06 to 10 m/s please specify the desired medium.	Sensor shaft:	Aluminum, Ø 16 mm (dimension ØS)
Accuracy:	± (1.0 % of meas. val. + 0.5 % of final value) for the specified medium.	Sensor length:	163 mm (dimension C) greater lengths are optionally available with an extension bar (only ex works)
		Cable exit:	Thread M 14 x 1.5 (dimension IG)
		Cable length:	2 m

Option

Order no.

Extension bar aluminum, Ø 16 mm, length 350 mm, installed on the rotating vane ex works, not removable!

OV9915HVS16A


Variants

Order no.

Digital vane anemometer for air and gases or for liquids, up to 40 m/s (air and gases), up to 100°C, integrated fixed cable, with ALMEMO® D6 plug. Please indicate the desired medium!

FVAD15H16GFAMC40

Digital vane anemometer series FVAD 15-H25

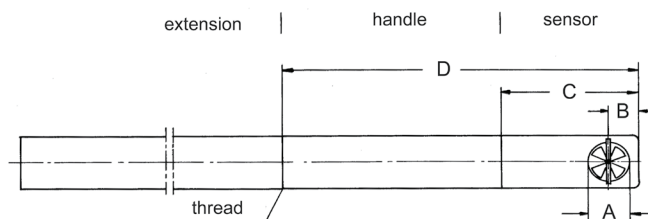

Digital vane anemometer FVAD 15-H25GAMN40

Technical data

Variant:	Mini, aluminum	dimension B 13.4 mm
Measured medium:	air and gases	Sensor shaft: aluminum, Ø 25 mm
Operative range:	-20 to +125 °C (including cable)	Sensor length: 170 mm (dimension D), greater lengths are optionally available with an extension bar (only ex works)
Pressure resistance:	up to 6 bar overpressure	Cable exit: Thread M 22 x 1.5
Measuring range:	0.4 to 40 m/s	Cable length: 2 m
Accuracy:	± (1.0 % of measured value + 0.5 % of final value)	
Type of rotating vane:	MN40GA, aluminum	
Measuring head:	Aluminum, Ø 25 mm dimension C 60 mm dimension A Ø 18.2 mm	

Option

Order no.

Extension bar aluminum, Ø 25 mm, length 350 mm, installed on the rotating vane ex works, not removable!

OV9915HVS25A

Ausführungen

Order no.

Digital vane anemometer for air and gases, up to 40 m/s, up to 125°C, integrated fixed cable, with ALMEMO® D6 plug.

FVAD15H25GAMN40

Digital vane anemometer FVAD 15-H25RGAMN40

Technical data

Variant:	Mini, aluminum, with integrated direction detection	dimension C 66 mm dimension A Ø 18.2 mm dimension B 13 mm
Measured medium:	air and gases	Sensor shaft: Aluminum, Ø 25 mm
Operative range:	-20 to +125 °C (including cable)	Sensor length: 166 mm (dimension D), greater lengths are optionally available with an extension bar (only ex works)
Pressure resistance:	up to 6 bar overpressure	Cable exit: Thread M 22 x 1.5
Measuring range:	± 0.4 to ± 40 m/s with direction detection	Cable length: 2 m
Accuracy:	± (1.0 % of measured value + 0.5 % of final value)	
Type of rotating vane:	MN40GA, aluminum	
Measuring head:	Aluminum, Ø 25 mm	

Option

Order no.

Extension bar aluminum, Ø 25 mm, length 350 mm, installed on the rotating vane ex works, not removable!

OV9915HVS25A


Ausführungen

Order no.

Digital vane anemometer for air and gases, up to 40 m/s, with integrated direction detection, up to 125°C, integrated fixed cable, with ALMEMO® D6 plug.

FVAD15H25RGAMN40

Digital vane anemometer FVAD 15-H25GEMN40T2



Technical data

Variant:	Mini, stainless steel, for high-temperature up to 260 °C	Sensor shaft:	dimension A Ø 18.2 mm dimension B 14 mm
Measured medium:	air and gases	Sensor length:	170 mm (dimension D), greater lengths are optionally available with an extension bar (only ex works)
Operative range:	-40 to +260 °C (including high- temperature cable)	Cable exit:	Thread M 22 x 1.5
Pressure resistance:	up to 10 bar overpressure	Cable length:	2 m high-temperature cable (up to 260 °C), cable repeater (-30 to 125 °C), 1.5 m cable (up to 125 °C)
Measuring range:	0.5 to 40 m/s		
Accuracy:	± (1,0 % of measured value + 0.5 % of final value)		
Type of rotating vane:	MN40GE, stainless steel		
Measuring head:	stainless steel, Ø 25 mm dimension C 81 mm		

Option

Order no.

Extension bar stainless steel, Ø 25 mm, length 350 mm, temperature-resistant from -20 to +240 °C (VITON O-ring), installed on the rotating vane ex works, not removable!

OV9915HVS25E

Ausführungen

Order no.

Digital vane anemometer for air and gases, up to 40 m/s, up to 260 °C, integrated fixed cable, with ALMEMO® D6 plug.

FVAD15H25GEMN40T2

Differential pressure and Pitot tube measurement Measuring connector FDA 602 S1K / S6K



Measuring connector FDA602S1K / S6K

- Pressure measuring connector in compact design for flow measurement with Pitot tubes
- Fitting for connecting hose between Pitot tube and pressure measuring connector
- Pressure measuring connector can be plugged directly onto the measuring instrument.

Technical data

Overload capacity	Maximum three times final value	Operating range	-10 to +60 °C, 10 to 90% RH, non-condensing
Max. common mode pressure	700 mbar	Dimensions	74 x 20 x 8.8 mm
Accuracy (zero-pt adjusted)	±0.5% of final value in range 0 to positive final value	Hose terminals	Ø 5 mm, 12 mm long
Nominal temperature	25 °C	Sensor material	aluminum, nylon, silicone, silica gel, brass
Temperature drift	< ±1.5 % of final value		
Compensated temp. range	0 to +70 °C		

! Advisory note when used in conjunction with ALMEMO® 2890, 5690, 5790, 8590, 8690, 500, 809: The new ALMEMO® pressure measuring connector is very slightly higher (8.8 mm). As a result adjacent input sockets on the ALMEMO® device may be partly covered. However, the 1st input socket can always be used without restriction. Or, alternatively, the ALMEMO® pressure measuring connector can be plugged in at any input socket using connecting cable ZA9060AK1.

! On ALMEMO® devices to obtain precise measured results in m/s the wind tunnel temperature can be entered in the -50 to +700 °C range for compensation purposes.

Accessories

ALMEMO® pressure measuring connector for barometric pressure 700 to 1100 mbar, without pressure terminal sleeve
Technical data see page 11.12

including programming for automatic atmospheric pressure compensation (comment *P)
(variant with pressure terminal sleeve, see page 10.10)

Connecting cable, 0.2 meters

Extension cable, 2 meters

1 set of silicone hoses

black / colorless, 2 meters

Silicone hose, black, per meter

Silicone hose, colorless, per meter

Order no.

FDAD12SA

OA9000PK

ZA9060AK1

ZA9060VK2

ZB2295S

ZB2295SSL

ZB2295SFL

Variants (including manufacturer's test certificate)

(including one set of silicone hoses, 2 meters)

Measuring ranges ±1250 Pa, Differential pressure (1 to 40 m/s), Measured variables: m/s, Pa,
Measuring connector, independent of position

Measuring ranges ±6800 Pa Differential pressure (2 to 90 m/s) Measured variables m/s, Pa,

Measuring connector, independent of position


Order no.

FDA602S1K

FDA602S6K

DAkKS or factory calibration KV90xx, air flow, and KD90xx, pressure, for sensor or measuring chain (sensor + device) (see chapter „Calibration certificates“). DAkKS calibration meets all the requirements regarding test resources laid down in DIN EN ISO/IEC 17025.

Pitot Tubes for Differential Pressure Sensors FDA602

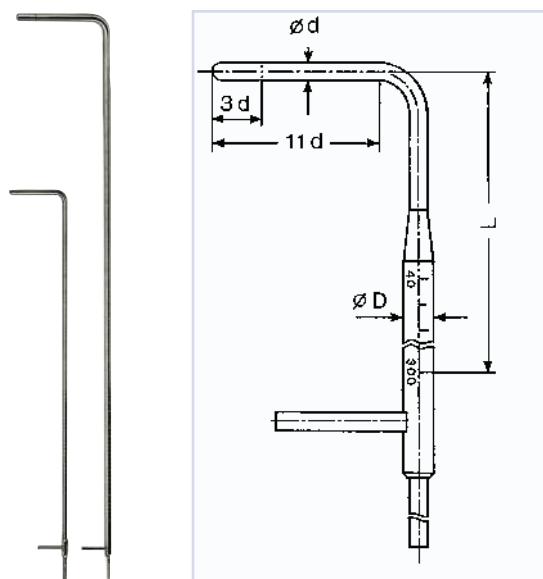

- Prandtl Pitot tubes with hemispheric head.
- For measuring the dynamic pressure, the tip of the Pitot tube has an opening of $0.3d$.
- For measuring the static pressure, a total of 12 holes with $0.1d$ \varnothing have been arranged at a distance of $3d$.



Mit ALMEMO® devices that have an option for entering factors can also be used to perform wind velocity measurements with cylindrical probes, according to VDEH. The cylindrical Pitot tubes have a probe-related coefficient of 1.7. By entering a factor of 0.767 in the range m/s this coefficient will be considered during the measurement.

Option

Movable screw connection for brass Pitot tubes with shaft diameter x (6; 8; 10; 20mm)
for steel Pitot tubes with shaft diameter x (6; 8; 10; 20mm)

Order no.

ZB9912KMx
ZB9912KVx

Types and Technical Data:

Head Diameter (d)	Shaft Diameter (D)	Length	Tmax	Permiss. Dust	Material	Order no.
3 mm	6 mm	300 mm	150°C	none	Nickel-plated brass	FD991233MS
3 mm	6 mm	300 mm	300°C	none	Chrome-nickel steel	FD991233VA
5 mm	8 mm	400 mm	350°C	none	Nickel-plated brass	FD991254MS
5 mm	8 mm	400 mm	500°C	none	Chrome-nickel steel	FD991254VA
5 mm	8 mm	600 mm	350°C	none	Nickel-plated brass	FD991256MS
5 mm	8 mm	600 mm	500°C	none	Chrome-nickel steel	FD991256VA
8 mm	8 mm	400 mm	350°C	low	Nickel-plated brass	FD991284MS
8 mm	8 mm	400 mm	500°C	low	Chrome-nickel steel	FD991284VA
8 mm	8 mm	800 mm	350°C	low	Nickel-plated brass	FD991288MS
8 mm	8 mm	800 mm	600°C	low	Chrome-nickel steel	FD991288VA
10 mm	10 mm	800 mm	350°C	some	Nickel-plated brass	FD991296MS
10 mm	10 mm	800 mm	600°C	some	Chrome-nickel steel	FD991296VA*
10 mm	10 mm	1000 mm	350°C	some	Nickel-plated brass	FD991297MS
10 mm	10 mm	1000 mm	600°C	some	Chrome-nickel steel	FD991297VA*
10 mm	20 mm	1500 mm	350°C	some	Nickel-plated brass	FD991298MS
10 mm	20 mm	1500 mm	600°C	some	Chrome-nickel steel	FD991298VA*
20 mm	20 mm	2000 mm	350°C	more	Nickel-plated brass	FD991299MS
20 mm	20 mm	2000 mm	600°C	more	Chrome-nickel steel	FD991299VA*

□*) all VA Pitot tubes can be operated up to 700°C for a short period

Digital thermoanemometer FVAD 35 THx with ALMEMO® D6 plug with integrated atmospheric pressure sensor, for automatic pressure compensation



- Automatic atmospheric pressure compensation is provided for pressure-dependent flow velocity by means of a digital atmospheric pressure sensor integrated in the ALMEMO® D6 plug itself.
- Digital thermoanemometer with A/D converter in the grip or integrated in the cable
- The probe tube has a small diameter, only 6 mm.
- All relevant measurable variables can be measured using just one sensor.
- Three measuring channels are programmed (at our factory): Temperature (°C, t), Flow velocity (m/s, v), Atmospheric pressure (mbar, AP, p)

General features and accessories, ALMEMO® D6 sensors: see page 01.08

DAkkS or factory calibration KV90xx air flow for digital sensor (see chapter „Calibration certificates“). DAkkS calibration meets all the requirements regarding test resources laid down in DIN EN ISO/IEC 17025.

Technical data

Digital thermoanemometer (Sensor including A/D converter)

Flow	
Measuring range	
FVAD 35 TH4 / TH4Kx	0.08 to 2 m/s
FVAD 35 TH5 / TH5Kx	0.2 to 20 m/s
Resolution	
FVAD 35 TH4 / TH4Kx	0.001 m/s
FVAD 35 TH5 / TH5Kx	0.01 m/s
Response time	<1.5 seconds
Accuracy	
FVAD 35 TH4 / TH4Kx	± (0.04 m/s +1% of meas. val.)
FVAD 35 TH5 / TH5Kx	± (0.2 m/s +2% of meas. val.)
Nominal conditions	22 °C ±2 K, 45 % RH ±10 % RH 1013 mbar
Temperature compensation	0 to +50 °C
Influence of temperature	
FVAD 35 TH4 / TH4Kx	±0.5 % of measured value /°C at 0.3 to 2 m/s
FVAD 35 TH5 / TH5Kx	±0.3% of measured value /°C at 0.3 to 20 m/s
Incidental flow	bidirectional
Angle dependence	<3% of measured value with deviation <15°
Pressure range	Ambient pressure
Pressure compensation	automatic in range 700 to 1100mbar

Temperature	
Measuring range	-20 to +70 °C
Resolution	0.1 °C
Accuracy	±0.7 °C at 0 to 50 °C and >0.5 m/s
Response time T ₉₀	typical 10 seconds

Digital atmospheric pressure sensor

(integrated in ALMEMO® D6 plug)	
Measuring range	700 to 1100 mbar
Accuracy	±2.5 mbar (at 23 °C ±5 K)

ALMEMO® D6 plug

Refresh rate	0.5 seconds for all 3 channels
Supply voltage	6 to 13 VDC
Current consumption	40 mA

Dimensions

Probe diameter	6 mm
Flow aperture	approx. 10 x 3 mm
FVAD 35 TH4 / TH5	
Probe with grip, probe lengths	210 mm (plus grip) ALMEMO® cable 1.5 meters
FVAD 35 TH4Kx / TH5Kx	
Probe with detached electronics unit integrated in the cable, Probe lengths	THxK1, 80 mm / THxK2, 300 mm
Probe cable 5 meters to the electronics	
ALMEMO® cable 1.5 m	

Accessories (for FVAD 35 THxK1 / K2 only)



	Order no.
Clamped screw connection with thread adapter for telescopic extension / extension set (maximum 80 °C)	ZV9915KV
Telescope extension Ø 15 to 24 mm 330 / 1010 mm	ZV9915TV
Extension set Ø 15 mm 4 x 255 mm	ZV9915VR3

Variants (including works certificate)

Digital thermoanemometer, fitted cable with ALMEMO® D6 plug and integrated digital atmospheric pressure sensor

Sensor 2 m/s, length = 210 mm, (with grip)	FVAD35TH4
Sensor 2 m/s, length = 80 mm, (detached electronics unit)	FVAD35TH4K1
Sensor 2 m/s, length = 300 mm, (detached electronics unit)	FVAD35TH4K2
Sensor 20 m/s, length = 210 mm, (with grip)	FVAD35TH5
Sensor 20 m/s, length = 80 mm, (detached electronics unit)	FVAD35TH5K1
Sensor 20 m/s, length = 300 mm, (detached electronics unit)	FVAD35TH5K2

Order no.

Other designs are available on request

High-temperature thermoanemometer MT8635THx
Operative range -40 to +120 °C, up to 40 m/s
Probe with detached electronics unit integrated in the cable



Thermoelectric Flow Sensor FV A605 TA



- Probe tube with heated miniature thermistor for flow measurement and precision NTC resistance for automatic compensation.
- Evaluation electronics are located in a separate sensor transmitter module.
- High accuracy as a result of integrated temperature compensation and individual calibration in wind tunnel, with laser Doppler anemometer as reference system.
- Response time only 2s for smoothing the measured value indicated, optionally without smoothing with 100ms response time.
- Suitable for measuring small flow velocities in gaseous substances, particularly for control systems and monitoring.
- Typical applications include comfort index measurements, HEVAC applications, environmental technology, clean room technology and process measuring and control technology.

Technical Data

Electronics Box with Sensor		Sensor length:	
Measuring range:		FV A605 TAx:	300mm
FV A605 TA1(O)	0.01 to 1m/s	FV A605 TAxO	310mm
FV A605 TA5(O)	0.15 to 5m/s	Sensor cable length:	1.5m
Resolution:		Storage temperature:	-30 to +90°C
FV A605 TA1(O)	0.001m/s	General Technical Specifications	
FV A605 TA5(O)	0.01m/s	Measurement medium:	dry air or inert gases
Accuracy:		Response time:	
FV A605 TA1(O)	±1.0% of final value and ±1.5% of meas. value	FVA605TAxD	smoothened, 1 τ = 2s
FV A605 TA5(O)	±0.5% of final value and ±1.5% of meas. value	FVA605TAxU	not smoothened, 1 τ = 100ms
Nominal conditions:	22°C, 960hPa Flow in the marked direction	Power supply:	through ALMEMO® device (approx. 7... 12V)
Automatic temperature compensation:	effective in range 0 to 40°C	Current consumption:	approx. 70mA
Temperature influence:	±0.5% of fin. value/°C	Output signal:	0 ... 1V, linearised, load resistance min. 10kohms
Sensor		Housing:	
Head size:	Ø 8mm	Dimensions:	100 x 60 x 35mm (L x W x H)
Shaft:	Ø 15mm	Protection system:	IP 40 (aluminium housing)
Operative range:	0 to 40°C	Weight:	approx. 250g
Angle of attack:		Operating temperature:	0 to 40°C
FV A605 TA1/TA5	±30°	Storage temperature:	-30 to 90°C
FV A605 TA10/TA50	±180°	Air humidity:	0 ... 90% r.H., non-condensing
Inlet opening:		Adjusting reference:	laser Doppler wind tunnel, adjustment at 22°C/approx. 960hPa, (certificate according to SN EN 45001)
FV A605 TAx:	9mm		
FV A605 TAxO:	protecting cage 110mm		

Types (incl. clamping holder and ALMEMO® connecting cable 1.5m long)

Unidirectional (sensitive in one direction) with protected measuring tip
 Measuring range up to 1m/s, smoothened
 Measuring range up to 5m/s, smoothened
 Measuring range up to 1m/s, not smoothened
 Measuring range up to 5m/s, not smoothened

Omnidirectional sensitive tip with protecting cage (Ø110mm) including carry-case
 Measuring range up to 1m/s, smoothened
 Measuring range up to 5m/s, smoothened
 Measuring range up to 1m/s, not smoothened
 Measuring range up to 5m/s, not smoothened

Order no.

FVA605TA1D
FVA605TA5D
FVA605TA1U
FVA605TA5U

FVA605TA10D
FVA605TA50D
FVA605TA10U
FVA605TA50U

DAkKS or factory calibration KV90xx, air flow, for sensor or measuring chain (sensor + device) (see chapter „Calibration certificates“).
 DAkKS calibration meets all the requirements regarding test resources laid down in DIN EN ISO/IEC 17025.

